


# Technisches

allerhand gesammelte technische Daten bunt gemischt

- [Steckerbelegungen KFZ-Anhänger 12 V](#)
- [Daten zu Schrauben](#)

# Steckerbelegungen KFZ- Anhänger 12 V


bis Fahrgestellnummer: 66500

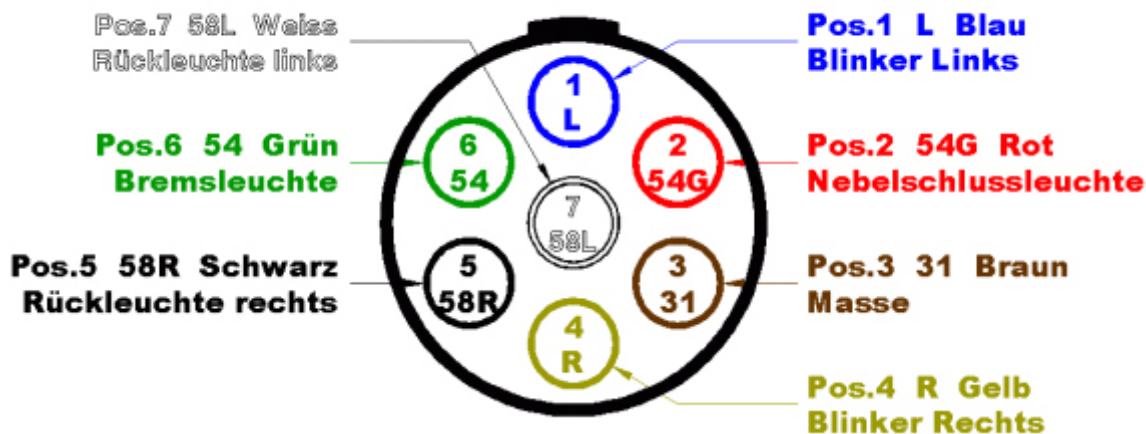


nach DIN/ISO 1724 (12V)



nach DIN 72570

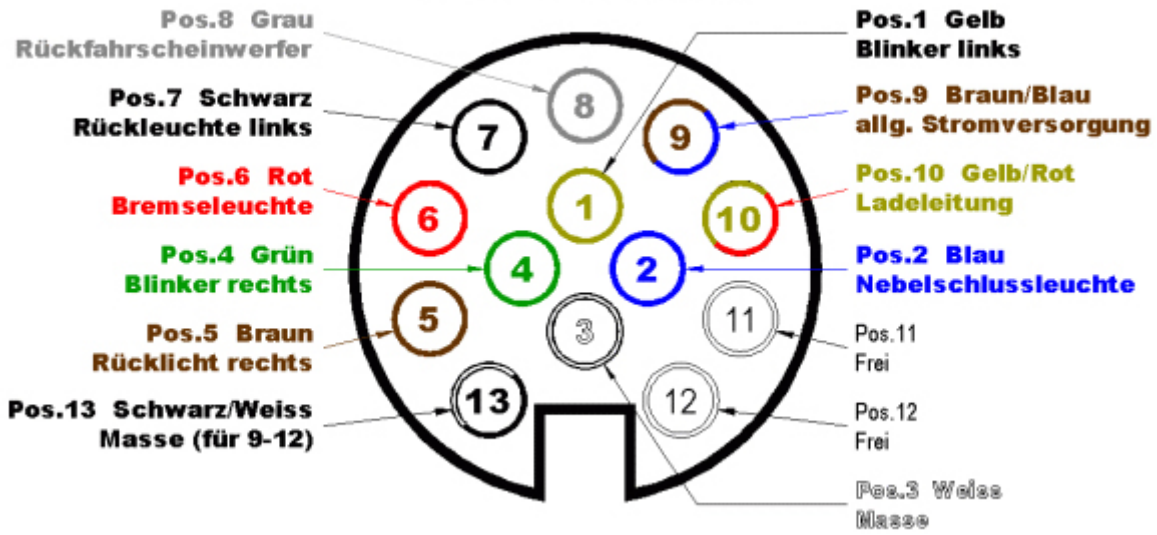

# Daten zu Schrauben

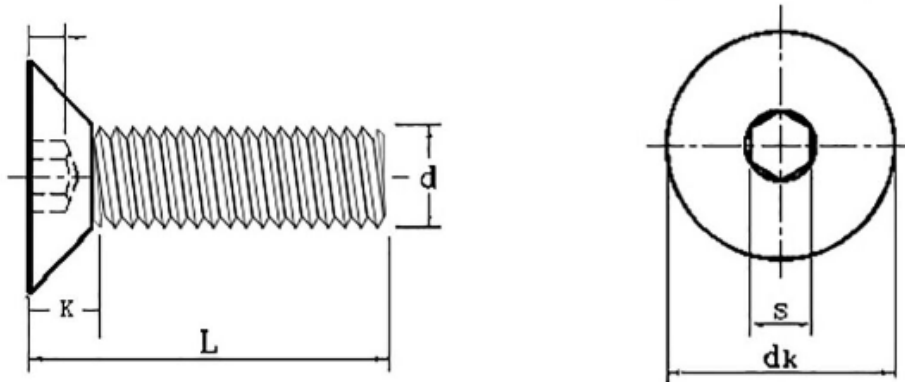

Unit:mm

d	M1.6	M2	M2.5	M3	M4	M5	M6	M8	M10	M12	M16	M20	
p	0.35	0.4	0.45	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2.5	
dk	max	3.0	3.8	5	6	8	10	12	16	20	24	29.8	35.5
	min	2.9	3.7	4.7	5.7	7.64	9.64	11.57	15.57	19.48	23.48	29.5	35.3
s	公称	1.2	1.5	1.5	2	2.5	3	4	5	6	8	10	12
	max	1.0	1.5	1.5	2.1	2.6	3.1	4.12	5.14	6.14	6.175	10.175	12.212
	min	0.9	1.4	1.4	2.02	2.52	3.02	4.02	5.02	6.02	8.025	10.025	12.032
t	max	-	-	-	1.2	1.8	2.3	2.5	3.5	4.4	4.6	5.3	5.9
	min	-	-	-	0.95	1.55	2.05	2.25	3.2	4.1	4.3	5	5.6
k	≈	1.1	1.9	2.5	2.5	3.4	4.1	4.9	6.2	7.6	9.6	10.6	11.4

Datenblatt Spax Schrauben